



CANTON

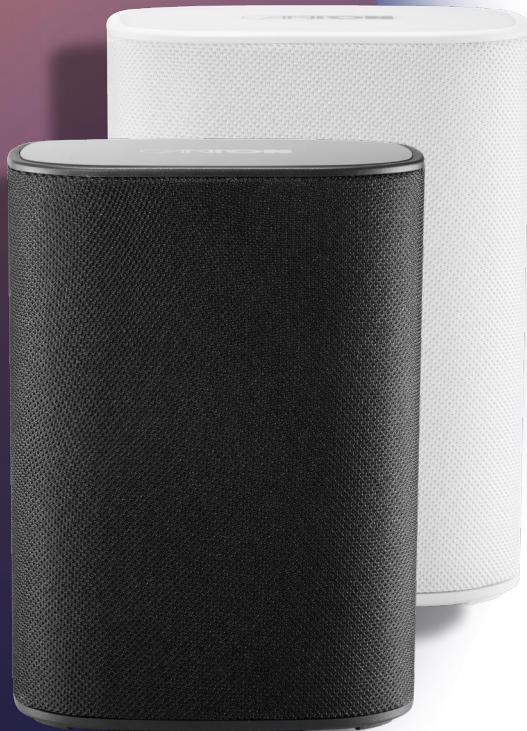

# QUICK START GUIDE

## SMART LIBERO

Initial Installation of Smart Libero with  
**Smart Soundbars** or **Smart Sounddecks**



## Initial Installation of Smart Libero using the Canton Smart App

To connect your **Smart Libero** to a **Smart Soundbar** or **Smart Sounddeck** using the **Canton Smart App**, it must be connected to your WLAN or LAN! If necessary, first establish the connection according to the operating manual for the Smart Soundbar or Smart Sounddeck! Then please proceed as follows:

1. Install the Canton Smart app on your mobile end device (e.g., smartphone) and open the app.
2. On the Canton Smart App home screen, select the Smart Soundbar resp. Smart Sounddeck to which you want to connect the Smart Libero in the "**DEVICES**" section. To do this, please scroll down.
3. Switch on the Smart Connect resp. Smart Amp using the "**ON / OFF**" power button. The "power symbol" will now shine green.
4. Scroll down and select the "**MAIN MENU**".
5. Then select the menu item "**Wireless Setup**".
6. There select the "**Wireless Pairing**" menu item.
7. To connect the first Smart Libero to the Smart Soundbar resp. Smart Sounddeck, first select the desired channel (location), e.g., "Surround Left."

8. The indication behind the selected channel changes from "Not paired" resp. "Disconnected" to "**Pairing**". The pairing process has now started. Now initiate the connection process on the Smart Libero as well.
9. To do this, please connect it to the **power supply** within **30 seconds**.  
If the Smart Libero is already connected to the power supply, alternatively press the **Pairing button** on the back of the Smart Libero **twice** with an interval of 1 to 2 seconds:  
    Press once to turn on the Smart Libero (LED changes from red to green flashing),  
    press once to start the pairing process (LED flashes green quickly).
10. Once the Smart Libero has been successfully connected, the Smart app will indicate „Connected“. The right LED on the back of the Smart Libero will now light up green continuously.
11. Repeat steps 7 to 10 to connect further Smart Libero speaker.
12. Once all Smart Libero speakers are connected, the process is completed successfully and you can close the Canton Smart app.

**Note:**

If the Smart Libero does not play any sound despite a successful connection, please check the playback mode setting (Play Mode) of the Smart Soundbar resp. Smart Sounddeck. With the default setting STEREO, for example, no audio signal is played by the surround speakers. Please use the Play Mode MOVIE or MUSIC. To change the play mode via the Canton Smart app, select the Smart Soundbar resp. Smart Sounddeck in the "**DEVICES**" section on the app's home screen and set the desired mode under "**PLAY MODE**".

**Troubleshooting:**

If an error occurred while connecting the Smart Libero, the message "**Fail**" resp. „**Not Connected**“ appears. In these cases, reset the Smart Libero to its factory settings.

**Reset to the factory settings:**

If necessary, connect the Smart Libero to the power supply resp. press the "Pairing Button" on the back to switch it on. The LED lights up resp. flashes green. Now press and hold the "**Pairing Button**" for at least 5 seconds until the right green LED turns off. After the reboot process, which takes about 5 seconds, the right LED will flash green. The Smart Libero has now been successfully reset to factory settings and can be reconnected. To do this, repeat steps 7 to 10.



## Initial Installation of Smart Libero using Remote Control

To connect your **Smart Libero** to a **Smart Soundbar** or **Smart Sounddeck** using the **Canton Smart Remote Control**, please proceed as follows:

1. Switch on the Smart Soundbar resp. Smart Sounddeck using the **Power button** "⏻" on the Smart Remote Control.
2. Now open the **Main Menu** by pressing the **Menu button** "M." The on-screen display (OSD) appears on your TV. The device display of your Smart Soundbar resp. Smart Sounddeck shows **[SPS]**.
3. Use the **Arrow keys** "↑/↓" to navigate to the menu item "**Wireless Setup**" **[WIS]** and select it with the "**OK**" button.
4. Confirm the menu item "**Wireless Pairing**" **[WSP]** with the "**OK**" button.
5. To connect the first Smart Libero to the Smart Soundbar resp. Smart Sounddeck, first use the **Arrow keys** "↑/↓" to select the desired **channel** (location), e.g., "Surround Left" **[SL]**. Confirm your selection with the "**OK**" button.
6. The indication behind the selected channel changes from "Not paired" resp. "Disconnected" to "**Pairing**" **[PIR]**. The pairing process has now started. Now initiate the connection process on the Smart Libero as well.

7. To do this, please connect it to the **power supply** within **30 seconds**.  
If the Smart Libero is already connected to the power supply, alternatively press the **Pairing button** on the back of the Smart Libero **twice** with an interval of 1 to 2 seconds:  
Press once to turn on the Smart Libero (LED changes from red to green flashing),  
press once to start the pairing process (LED flashes green quickly).
8. Once the Smart Libero has been successfully connected, the OSD will indicate "**Connected**" behind the selected channel, and the device display will briefly show **[CON]**. The right LED on the back of the Smart Libero now lights up green continuously.
9. Repeat steps 5 to 8 to connect the further Smart Libero speaker.
10. Once all Smart Libero speakers are connected, the process is completed successfully and you can exit the menu by pressing the **Menu button "M"** three times.

**Note:**

If the Smart Libero does not play any sound despite a successful connection, please check the playback mode setting (Play Mode) of the Smart Soundbar resp. Smart Sounddeck. With the default setting STEREO, for example, no audio signal is played by the surround speakers. Please select the MOVIE or MUSIC mode by pressing the "**Play Mode**" **button** on the Smart Remote Control.

**Troubleshooting:**

If an error occurred while connecting the Smart Libero, the message "**Fail**" **[FAI]** resp. "**Disconnected**" **[DIS]** will appear. In this case, reset the Smart Libero to its factory settings.

**Reset to the factory settings:**

If necessary, connect the Smart Libero to the power supply resp. press the "Pairing Button" on the back to switch it on. The LED lights up resp. flashes green. Now press and hold the "**Pairing Button**" for at least 5 seconds until the right green LED turns off. After the reboot process, which takes about 5 seconds, the right LED will flash green. The Smart Libero has now been successfully reset to factory settings and can be reconnected. To do this, repeat steps 5 to 8. can be reconnected. To do this, repeat steps 7 to 10.



For further questions, please don't hesitate to contact our Customer Service:

**Canton Elektronik GmbH + Co. KG**

Neugasse 21-23  
61276 Weilrod, Germany

Phone: +49 (0)6083 2870

[service@canton.de](mailto:service@canton.de)

[www.canton.de](http://www.canton.de)

All Statements without guarantee.  
Technical changes, typing errors and other errors reserved.

